



DicroLED Cabinet™ Eco-LED™ series

Architectural highlights in LEDs

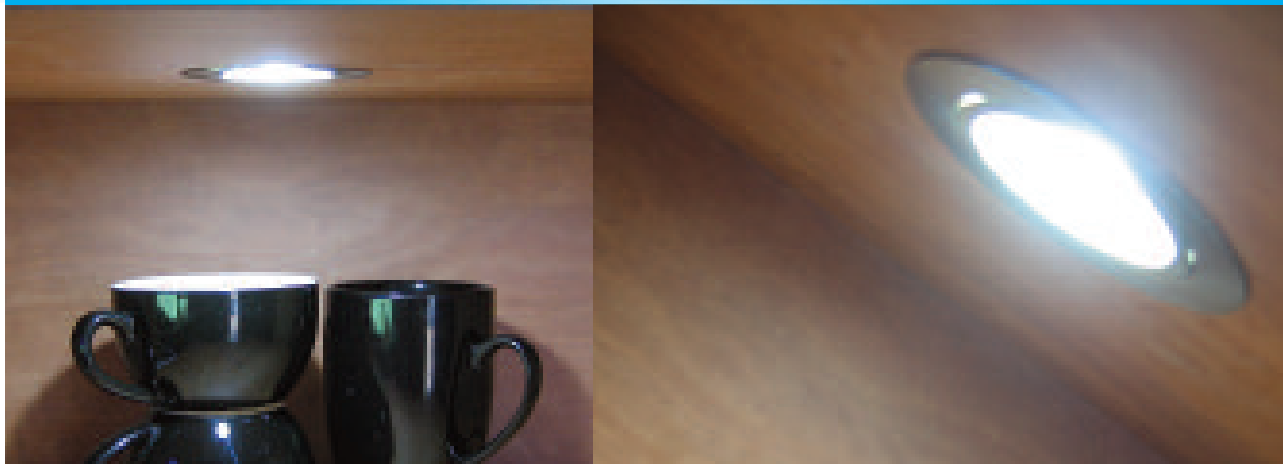

Features include:

- Fixed under shelf downlight powered by either a 3W or 1W LED in cool or warm white
- May be recessed or surface mounted
- Supplied in choice of white, black, brass, chrome or satin chrome with frosted glass
- Energy efficient, up to **90% reduction in energy consumption** compared to incandescent lights
- Units have continuous life span running **50,000 hours plus** for years of continuous use
- **Environmentally friendly**, containing no mercury or sodium
- Solid state electronic light source (Light Emitting Diodes) means virtually no maintenance
- Very **easy to install** safe extra low voltage 12 volts
- Safe to touch with low heat radiation and **no UV emissions**
- Moisture and impact resistant

Specifications	
Watts	1W
LEDs	1
Power	12V
Current	350mA
Colour 1W - CW	4500-5500k
Colour 1W - WW	3500-4500k
Beam angle	110 degrees

Specifications	
Watts	3W
LEDs	1
Power	12V
Current	800mA
Colour 3W - CW	5000-6500k
Colour 3W - WW	3800-5000k
Beam angle	110 degrees

www.ledfx.com.au



LedFX

9b Lakewood Blvd. Braeside VIC 3195
 P: 03 9588 1282 F: 03 9588 2088
 E: sales@ledfx.com.au

All dimensions are approximate. The information provided in this brochure is representative of the actual products available at the time of printing. Due to our continuous product development, the designs and specifications depicted are subject to change without notice. Please confirm all particulars with your sales consultant prior to purchase. Each product is covered by a limited warranty. Full terms and conditions are available from your sales consultant. NeonGlo™, LedStar®, DicroLed™, SplashLite®, Luxstar® & EdgeLed™ are covered by one or more of the following patents: 200100435/2002100441/2002100439 by Cgm Technologies Pty Ltd. © 2004.