



# 21W Par Lamp<sup>®</sup> Eco-LED™ series

Architectural highlights in LEDs



#### Features include:

- Choice of 30° or 60° spread in 15W to 21W power range
- Use for general lighting in any commercial environment
- Energy efficient, up to **90% reduction in energy consumption** compared to incandescent lights
- Available in red, green, blue, yellow, white and warm white
- Units have continuous life span running **50,000 hours plus**
- **Environmentally friendly**, low heat radiation with **no UV or thermal radiation**
- Solid state electronic light source (Light Emitting Diodes) means virtually no maintenance

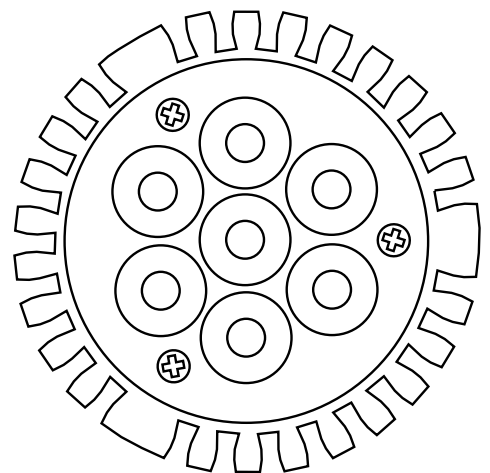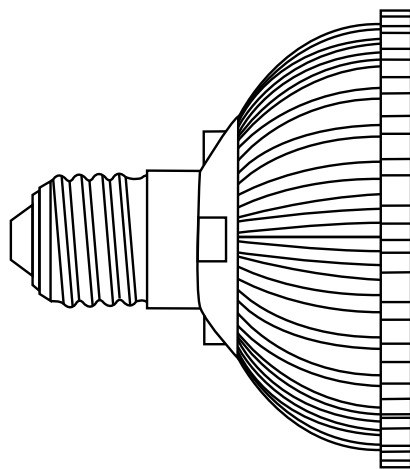

www.ledfx.com.au



## LedFX

9b Lakewood Blvd. Braeside VIC 3195

P: 03 9588 1282 F: 03 9588 2088

E: sales@ledfx.com.au

All dimensions are approximate. The information provided in this brochure is representative of the actual products available at the time of printing. Due to our continuous product development, the designs and specifications depicted are subject to change without notice. Please confirm all particulars with your sales consultant prior to purchase. Each product is covered by a limited warranty. Full terms and conditions are available from your sales consultant. NeonGlo™, LedStar®, DicroLed™, SplashLite®, Luxstar® & EdgeLed™ are covered by one or more of the following patents: 200100435/2002100441/2002100439 by Cgm Technologies Pty Ltd. © 2004.